
CRUISE CONTROL MAIN SWITCH REPLACEMENT

82045_01

HINT:

Installation is in the reverse order of removal.

- 1. PRECAUTION (SEE PAGE 60-1)
- 2. DISCONNECT BATTERY NEGATIVE TERMINAL (SEE PAGE 60-1)
- 3. REMOVE STEERING WHEEL COVER LOWER NO.2
- 4. REMOVE STEERING WHEEL COVER LOWER NO.3
- 5. REMOVE HORN BUTTON ASSY (SEE PAGE 60-20)

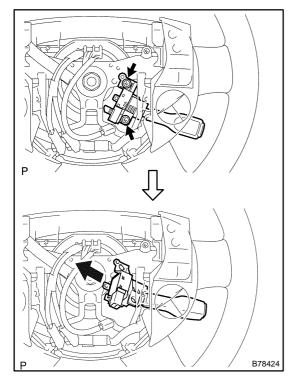

6. REMOVE CRUISE CONTROL MAIN SWITCH

- (a) Disconnect the connector.
- (b) Remove the 2 screws and cruise control main switch.

- 7. INSTALL HORN BUTTON ASSY (SEE PAGE 60-20)
- 8. CONNECT BATTERY NEGATIVE TERMINAL (SEE PAGE 19-2)
- 9. INSPECT HORN BUTTON ASSY (SEE PAGE 60-14)
- 10. INSPECT SRS WARNING LIGHT (SEE PAGE 05-1396)
- 11. PERFORM INITIALIZATION (SEE PAGE 01-28)

Author: Date: 3988